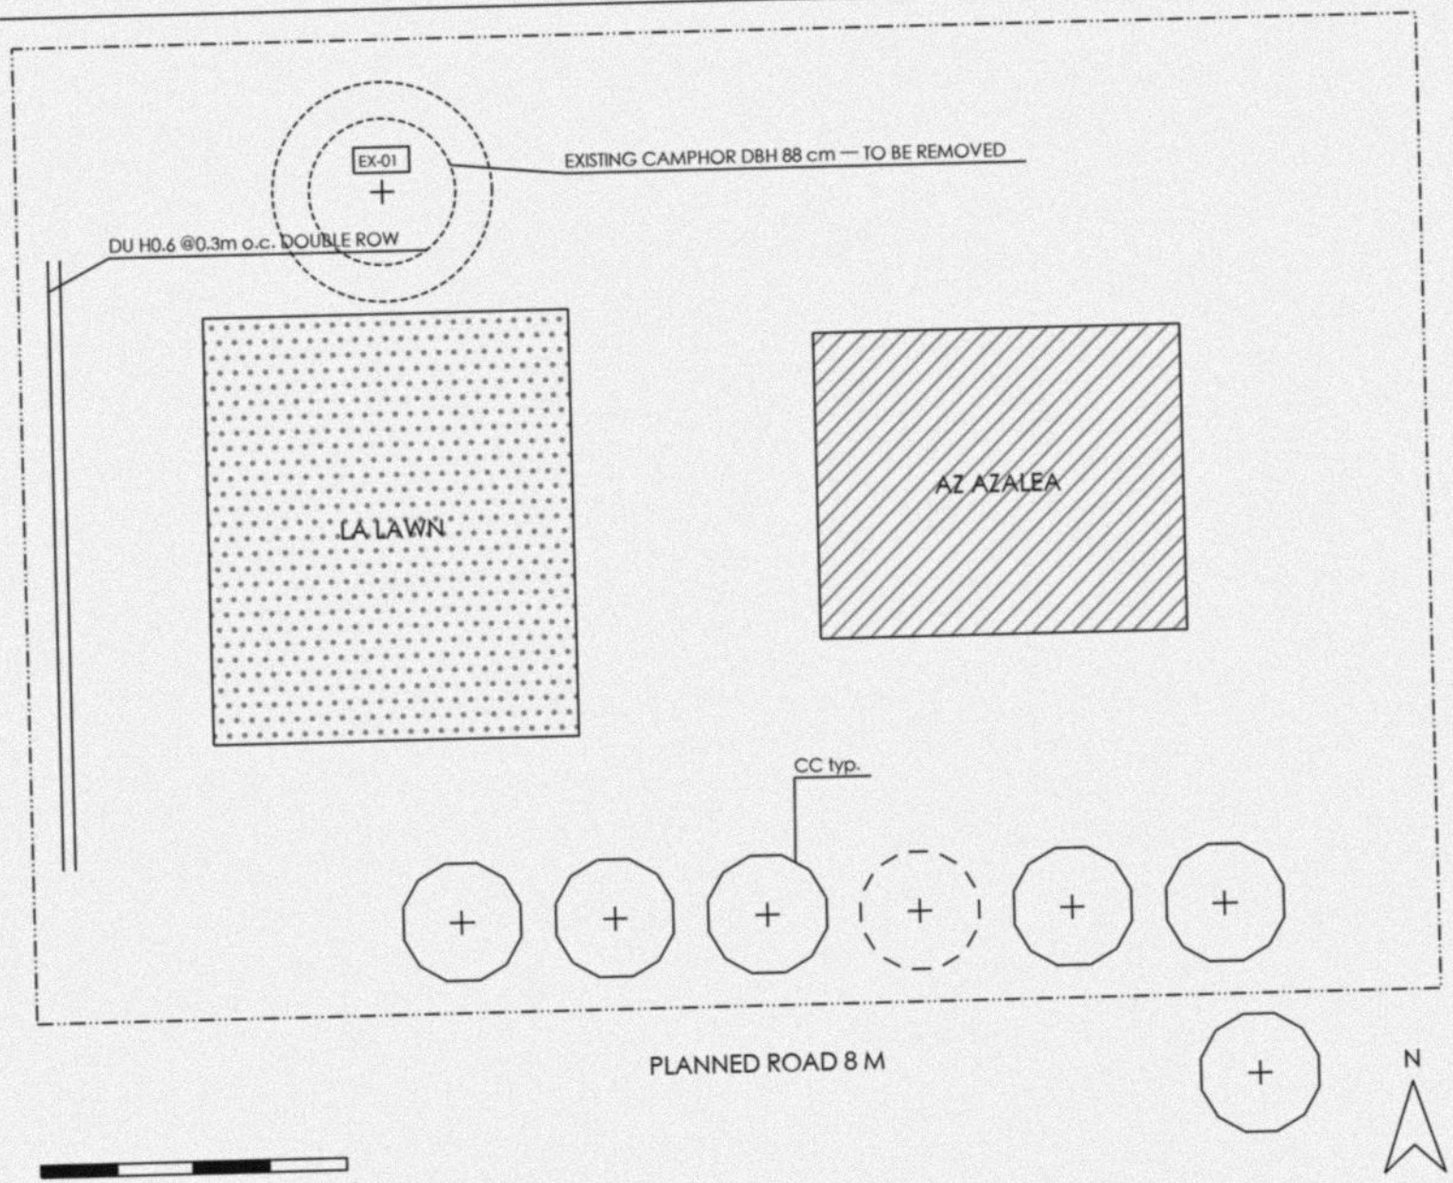


LEGEND

- CC CAMPHOR
- AZ AZALEA
- DU DURANTA

PLANT SCHEDULE

CODE	COMMON NAME	BOTANICAL NAME	QTY	UNIT	SPEC CAL. (cm)	SPEC HT (m)	SPEC SPREAD (m)	REMARKS
TREES								
CC	Camphor	Cinnamomum camphora	12	EA	10	3.5	1.5	NATIVE, ROOT-BALLED
SHRUBS								
DU	Duranta	Duranta erecta	134	EA	-	0.6	-	@0.3m o.c., DOUBLE ROW
AZ	Azalea	Rhododendron spp.	120	m²	-	0.3	-	4 PLANTS/m²
GROUNDCOVERS								
LA	Lawn	Zoysia matrella	168	m²	-	-	-	SOD
TOTAL TREES: 12								

PROJECT	Riverside Court
WORKS	Landscape over basement slab
TITLE	Planting Plan
DRAWING NO.	L-1
SCALE	1:200
SITE AREA	1,472 m²
BUILDING COVERAGE	45%
GROUND	ARTIFICIAL GROUND
REV	A
DATE	2026-09-18

REVISIONS

A	2026-09-18	ISSUED FOR REVIEW

GENERAL NOTES
1. PLANT QUANTITIES ON PLAN TAKE PRECEDENCE OVER THE SCHEDULE.
2. TREE PITS ON THE BASEMENT SLAB: SEE DETAIL L-6.
3. EXISTING TREES ARE SHOWN DASHED, WITH THEIR ROOT PROTECTION ZONE.